

Venti-Pak®

High-Efficiency Extended Surface Microglass Bag Filter

MERV 10, 11, 13, and 14




Microglass Media for Maximum Dust Holding Capacity, Long Service Life

Parker's Venti-Pak® filters provide the best value in medium to high-efficiency filtration. A lot of high-loft Microglass media delivers maximum dirt holding capacity. The media is unaffected by moisture or humidity and pocket integrity is maintained through a double lock stitch design and span stitch design that allows air to flow smoothly through the filter. Venti-Pak Series filters are available in a variety of sizes and pocket counts in varying efficiencies.

Markets:

- Automotive
- Food processing
- Microelectronics manufacturing
- Data centers
- Commercial office buildings
- Schools and universities
- Clean manufacturing facilities
- Hospitals and healthcare facilities
- Government institutions
- Industrial manufacturing

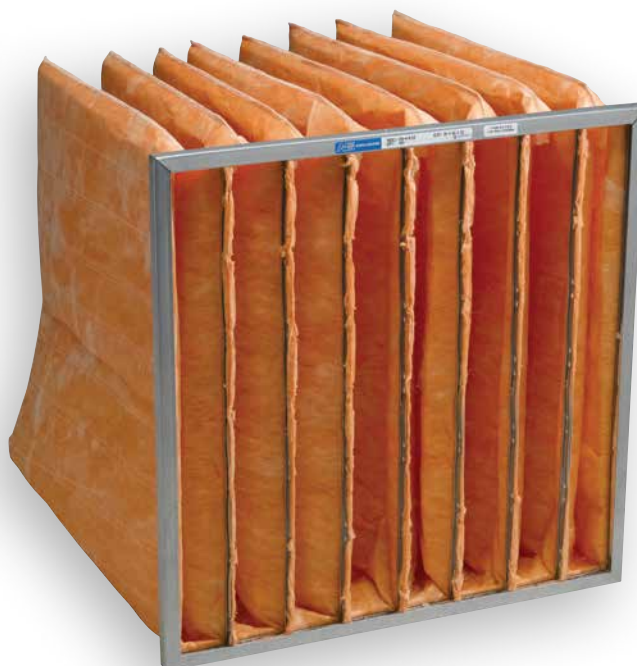

Contact Information:

Parker Hannifin Corporation
HVAC Filtration Division
100 River Ridge Circle
Jeffersonville, Indiana 47130

phone 866 247 4827

www.parker.com/HVAC

Product Features:

- All pocket edges bonded with a high-integrity, double lock stitch design
- Span stitch separators inside the pockets create channels for smooth air flow and lower resistance
- High-loft Microglass media
- Durable, corrosion-resistant header and pocket retainers



ENGINEERING YOUR SUCCESS.



Venti-Pak® Filters Offer Great Value with Up to 90 – 95% Efficiency with MERV 14 Performance

Specifications

Nominal Size (H x W x D) Inches	Actual Size (H x W x D) (Inches)	# of Pockets	Rated Air Velocity (FPM)	Rated Air Flow (CFM)	VP-M14 MERV 14	VP-M13 MERV 13	VP-M11 MERV 11	VP-M10 MERV 10	Media Area (Square Feet)
24 x 24 x 36	23-3/8 x 23-3/8 x 36	08	500	2000	0.46	0.40	0.26	0.23	105
24 x 24 x 36	23-3/8 x 23-3/8 x 36	06	500	2000	0.59	0.52	0.33	0.30	82
24 x 24 x 29	23-3/8 x 23-3/8 x 29	10	500	2000	0.45	0.39	0.25	0.23	107
24 x 24 x 29	23-3/8 x 23-3/8 x 29	08	500	2000	0.55	0.48	0.31	0.28	88
24 x 24 x 29	23-3/8 x 23-3/8 x 29	06	500	2000	0.71	0.62	0.40	0.36	68
24 x 24 x 22	23-3/8 x 23-3/8 x 22	10	500	2000	0.61	0.53	0.35	0.31	79
24 x 24 x 22	23-3/8 x 23-3/8 x 22	08	500	2000	0.76	0.66	0.43	0.39	64
24 x 24 x 22	23-3/8 x 23-3/8 x 22	06	500	2000	0.97	0.84	0.55	0.49	50
24 x 24 x 18	23-3/8 x 23-3/8 x 18	10	500	2000	0.76	0.66	0.43	0.39	64
24 x 24 x 18	23-3/8 x 23-3/8 x 18	08	500	2000	0.91	0.80	0.51	0.46	53
24 x 24 x 18	23-3/8 x 23-3/8 x 18	06	500	2000	1.18	1.03	0.67	0.60	41
24 x 24 x 15	23-3/8 x 23-3/8 x 15	10	375	1400	0.63	0.55	0.35	0.32	54
24 x 24 x 15	23-3/8 x 23-3/8 x 15	08	375	1400	0.77	0.67	0.43	0.39	44
24 x 24 x 15	23-3/8 x 23-3/8 x 15	06	375	1400	1.00	0.87	0.56	0.51	34
24 x 24 x 12	23-3/8 x 23-3/8 x 12	10	375	1400	0.79	0.69	0.44	0.40	43
24 x 24 x 12	23-3/8 x 23-3/8 x 12	08	375	1400	0.97	0.84	0.55	0.49	35
24 x 24 x 12	23-3/8 x 23-3/8 x 12	06	375	1400	1.25	1.10	0.71	0.64	27
24 x 20 x 22	23-3/8 x 19-3/8 x 22	05	500	1670	0.96	0.84	0.54	0.49	42
24 x 12 x 36	23-3/8 x 11-3/8 x 36	04	500	1000	0.47	0.20	0.13	0.12	52
24 x 12 x 29	23-3/8 x 11-3/8 x 29	04	500	1000	0.55	0.48	0.31	0.14	44
24 x 12 x 22	23-3/8 x 11-3/8 x 22	04	500	1000	0.38	0.33	0.21	0.19	32
24 x 12 x 22	23-3/8 x 11-3/8 x 22	03	500	1000	0.48	0.42	0.27	0.25	25
24 x 12 x 18	23-3/8 x 11-3/8 x 18	04	500	1000	0.47	0.41	0.26	0.24	26
24 x 12 x 15	23-3/8 x 11-3/8 x 15	04	375	750	0.41	0.36	0.23	0.21	22
24 x 12 x 12	23-3/8 x 11-3/8 x 12	04	375	750	0.53	0.47	0.30	0.27	17
20 x 24 x 22	19-3/8 x 23-3/8 x 22	06	500	1670	0.46	0.40	0.26	0.23	42
20 x 24 x 18	19-3/8 x 23-3/8 x 18	06	500	1670	0.55	0.48	0.31	0.28	35
20 x 20 x 22	19-3/8 x 19-3/8 x 22	06	500	1400	0.39	0.34	0.22	0.20	41
20 x 20 x 22	19-3/8 x 19-3/8 x 22	05	500	1400	0.45	0.39	0.25	0.23	35
20 x 20 x 12	19-3/8 x 19-3/8 x 12	06	375	1050	0.54	0.47	0.30	0.27	22
20 x 20 x 12	19-3/8 x 19-3/8 x 12	05	375	1050	0.62	0.54	0.35	0.32	19

NOTES:

1. Testing per ASHRAE Standard 52.2-2017. Performance based on 492 FPM face velocity for a 24x24x29, 8 pocket filter.
2. Recommended final resistance 1.50" W.G.
3. Width and height dimensions are not interchangeable. Bag filters must be installed with pockets running vertically.
4. Maximum operating temperature 190°F (88°C)
5. Classified per UL 900 for flammability
6. See *Venti-Pak Ordering Information* sheet for available sizes and options

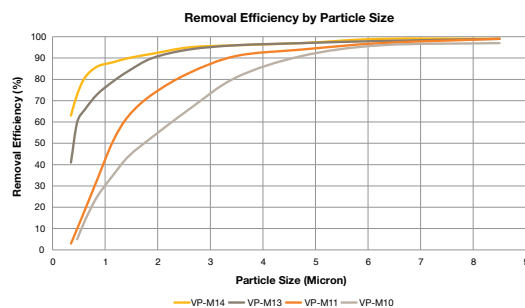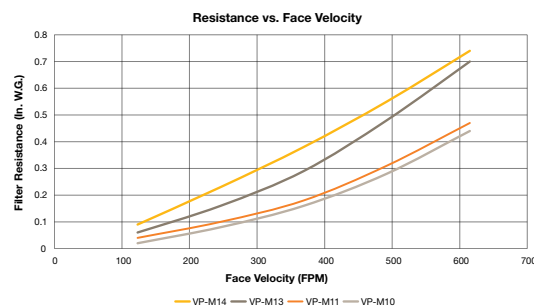

WARNING: This product can expose you to chemicals, including acetaldehyde and nickel which are known to the State of California to cause cancer, and lead and methanol, which are known to the State of California to cause birth defects and other reproductive harm. For more information go to www.P65Warnings.ca.gov.

